

---

# FRANCE

---

## ServiceMaster - Open Core & Coil

---

### Universal Replacement Units



**6025 SEG-U**

**3020 SEG-U**




- ◆ Designed for indoor use in small signs where space is at a premium
- ◆ Utilizes a high quality Polyester impregnation to guard against moisture absorption
- ◆ Primary leads and highly flexible GTO-10 Secondary leads are 6" long on 3020 and 14" long on 6025.
- ◆ 3020 - One End Ground, self-adjusting 2000 to 3000 Volts
- ◆ 6025 - Mid-Point Ground, self-adjusting 3500 to 6000 Volts

---



**[www.franceformer.com](http://www.franceformer.com)**

# SEG-U - Open Core & Coil

Catalog Number	VAC	HZ	Secondary		Primary VA	Input Amp	Wt. lbs.	Case Dimensions in Inches				
			Volts	mA				L	W	H	A	B
6025 SEG-U	120	60	6000	25	190	1.60	7.7	6.250	3.250	3.062	5.688	2.562
3020 SEG-U	120	60	3000	20	85	0.70	3.4	3.687	2.812	3.062	3.125	2.125

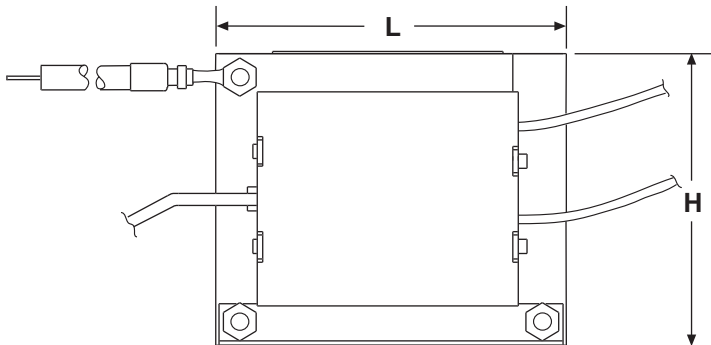

**3020 SEG-U**

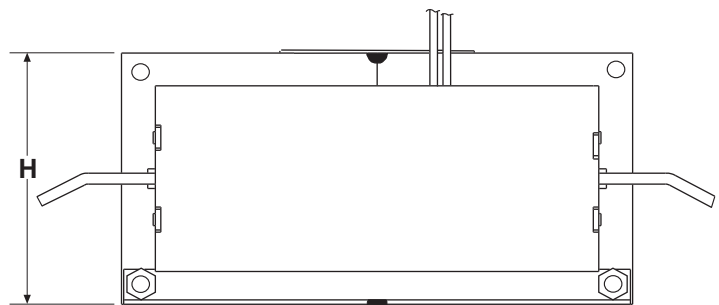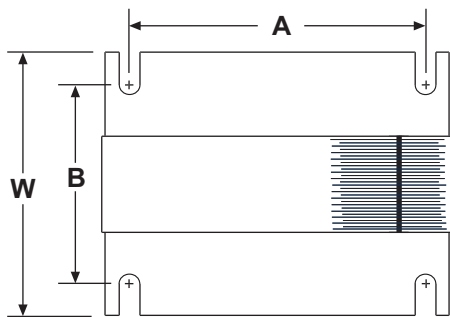

**6025 SEG-U**

