
FRANCE

P2G Series 7530 P2 & 9030 P4

**Low Profile
Outdoor Non-weatherproof**



P2G Models - UL 2161 Listed  

P2 & P4 Models - Not Listed

- ◆ Low Profile Design Allows for Increased Mounting Flexibility
- ◆ Use in Virtual Series, Mid-point Return or Series Wiring Methods
- ◆ Heavy Duty Steel Casing
- ◆ Ratings 4000 V and up are available in 120 & 277 V



www.franceformer.com

P2G Series

7530 P2 & 9030 P4

Catalog Number	VAC 120/277	Hz 50/60	Secondary		Primary VA	Input Amp.	Wt lbs	Case Dimensions					
			Volts	mA				L	W	H	A	B	C
* 6030 P2G	120	60	6000	30	180	1.65	10	10.5	3.6875	2.9375	8.4375	1.88	8.875
* 5030 P2G	120	60	5000	30	160	1.4	10	10.5	3.6875	2.9375	8.4375	1.88	8.875
* 4030 P2G	120	60	4000	30	140	1.15	10	10.5	3.6875	2.9375	8.4375	1.88	8.875
● 3030 P2G	120	60	3000	30	105	.85	10	10.5	3.6875	2.9375	8.4375	1.88	8.875
* 6030 P2G	277	60	6000	30	180	.75	13	10.5	3.6875	2.9375	8.4375	1.88	8.875
* 5030 P2G	277	60	5000	30	160	.60	13	10.5	3.6875	2.9375	8.4375	1.88	8.875
* 4030 P2G	277	60	4000	30	140	.50	13	10.5	3.6875	2.9375	8.4375	1.88	8.875
❖ 7530 P2	120	60	7500	30	225	1.88	10	10.5	3.6875	2.9375	8.4375	1.88	8.875
❖ 7530 P2	277	60	7500	30	225	0.81	13	10.5	3.6875	2.9375	8.4375	1.88	8.875
* 9030 P4	120	60	9000	30	270	2.25	12	10.5	3.6875	3.4375	8.4375	1.88	8.875
* 9030 P4	277	60	9000	30	270	0.97	15	10.5	3.6875	3.4375	8.4375	1.88	8.875

- * Secondary - Balanced Mid-point Ground
- ❖ Secondary - Unbalanced Mid-point Ground
- Secondary - One End Ground

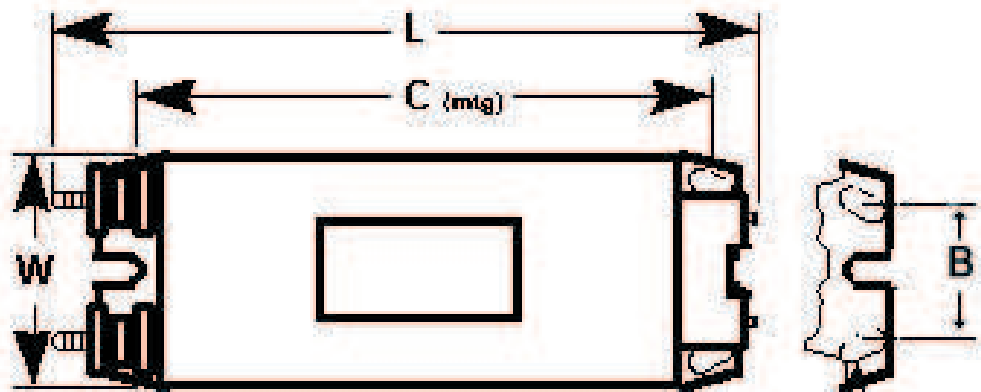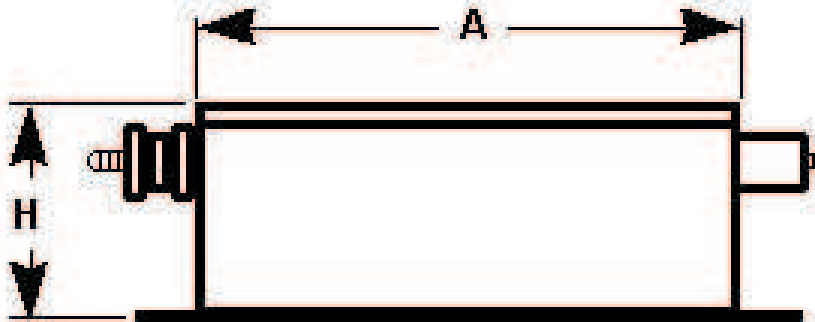

4 Slots 3/8" x 3/4"