




## Electrical and Mechanical Data

Catalog Number	VAC	Hz	Secondary		Primary VA	Input Amps	Wt. Lbs.	Case Dimensions								
			Volts	mA				L	W	H	A	B	C	D	E	F
9030 P5G-2ELP	120	60	9000	30	285	2.35	11	10.00	3.69	3.40	8.37	2.05	9.00	1.31	2.18	1.88
7530 P5G-2ELP	120	60	7500	30	250	2.10	11	10.00	3.69	3.40	8.37	2.05	9.00	1.31	2.18	1.88
9030 P5G-2ELP 277	277	60	9000	30	280	1.00	11	10.00	3.69	3.40	8.37	2.05	9.00	1.31	2.18	1.88
7530 P5G-2ELP 277	277	60	7500	30	235	0.85	11	10.00	3.69	3.40	8.37	2.05	9.00	1.31	2.18	1.88

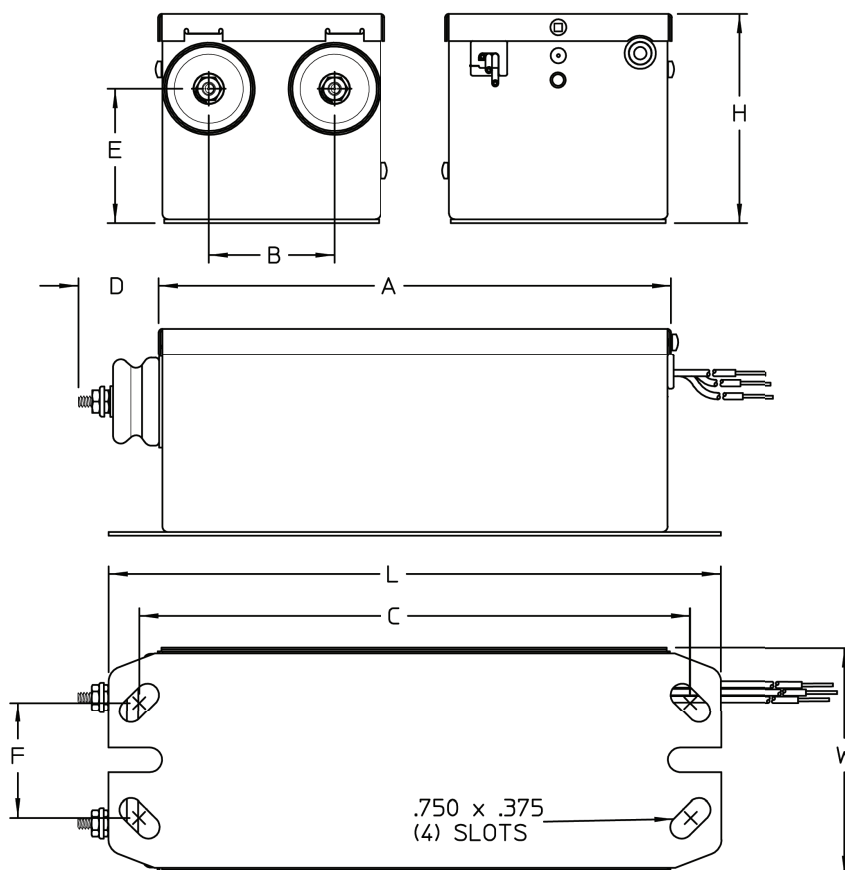

DIAGNOSTIC LED FAULT CODES	
LED Fault Code	Indicates
Steady ON	Operating normally
Continuous Flashing	In Service Mode
1 - Flash	15 second Diagnostic & Auto Reset Mode
2 - Flash	Secondary Ground Fault with service ground connected
3 - Flash	Secondary Ground Fault when service ground not connected
4 - Flash	Input Voltage exceeds 120% of rated
5 - Flash	Line & Neutral reversed on input connections