

# FRANCE

LIGHTING SIGNS FOR OVER A CENTURY



Excellent Reliability, Quality, Warranty  
800-793-4793 | [www.sfeg.com](http://www.sfeg.com)

## LED-1260WMPS



## FRANCE COMPACT WET-LISTED 60W 12V CLASS 2 LED POWER SUPPLY



### SPECIFICATIONS

#### Size

8.05" Long x 1.97" Wide x 1.42" Tall  
Including Baseplate & Conduit Fittings, 2 lbs

#### Ambient Operating Temperature

-30°C to 60°C

#### Input

120/277VAC, 50/60Hz, 1.2/.70 Amp Max

#### Output

12VDC, 5 Amp, 60 Watt, Class 2  
No Minimum Loading Requirement

#### Lead Length

12" RTJW Input and Output

#### Environment

IP68, For Use in Dry, Damp, or Wet Locations  
UL Listed Class P  
FCC Part 15 Class B Residential or Commercial

#### Warranty

5 Year France LED Warranty

## A Fusion of Performance, Quality, Compact Size, and Value

### Compact Wet-Listed Construction

Low profile and fully potted, with wet-listed conduit fittings for maximum water resistance

### Tru-Power™ Rated

Designed to operate reliably at full rated power at maximum rated ambient temperature - No need to de-rate like other competing products

### Overload Protection Shut Down

Unit blinks LEDs when significantly overloaded  
Integrated short circuit protection with automatic reset

### High Electrical Efficiency


Low energy costs and cool operation in a small package  
85° maximum case temperature

For more information, contact  
your France distributor or email  
us at [sales@sfeg.com](mailto:sales@sfeg.com)

# LED-1260WMPS Wet-Listed 60 Watt 12V Class P LED Power Supply

## Electrical Specification

Input Voltage	120VAC   277VAC	Output Voltage	12VDC
Input Frequency	50/60 Hz	Rated Output Current	5.0 Amps
Max Input Current	1.2A   .70A	Rated Output Power	60 Watts

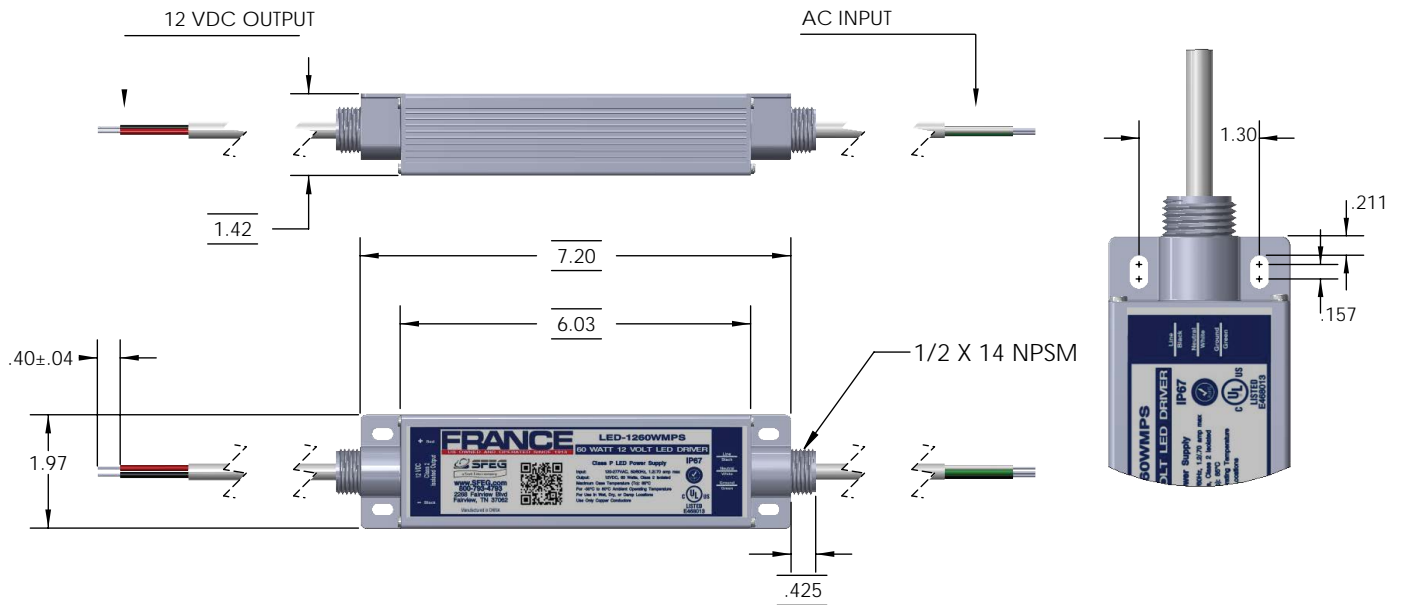

## Check out our other LED Products




### LED-1260MMPS

60W 12V Class 2 LED power supply  
 Compact size, great performance and value  
 Excellent thermal characteristic and overload protection  
 For use in Dry or Damp locations  
 UL Class P Listed  
 France 5 year warranty

### LED Fast-Pak™ Kits

Complete UL listed assemblies, pre-assembled, pre-wired and worry free.



### LED Fast-Pak™

14.85" long x 5.30" wide x 3.21" in tall  
 Features LED-1260EPS power supply  
 Wet-listed enclosure



### mini LED Fast-Pak™

9.71" long x 4.73" wide x 2.99" tall  
 Features LED-1260MPS power supply  
 Horizontal or vertical mount  
 Wet-listed enclosure



### Double mini LED Fast-Pak™

10.49" long x 8.78" wide x 2.99" tall  
 Features 2X LED-1260MPS power supply  
 Horizontal or vertical mount  
 Wet-listed enclosure

For more information, contact your France distributor or email us at [sales@sfeg.com](mailto:sales@sfeg.com)